


# D5A TA

**4.76 litre, in-line 4 cylinder - Constant engine speed**

92 kWm at 1500 rpm & 100 kWm at 1800 rpm

CCNR2

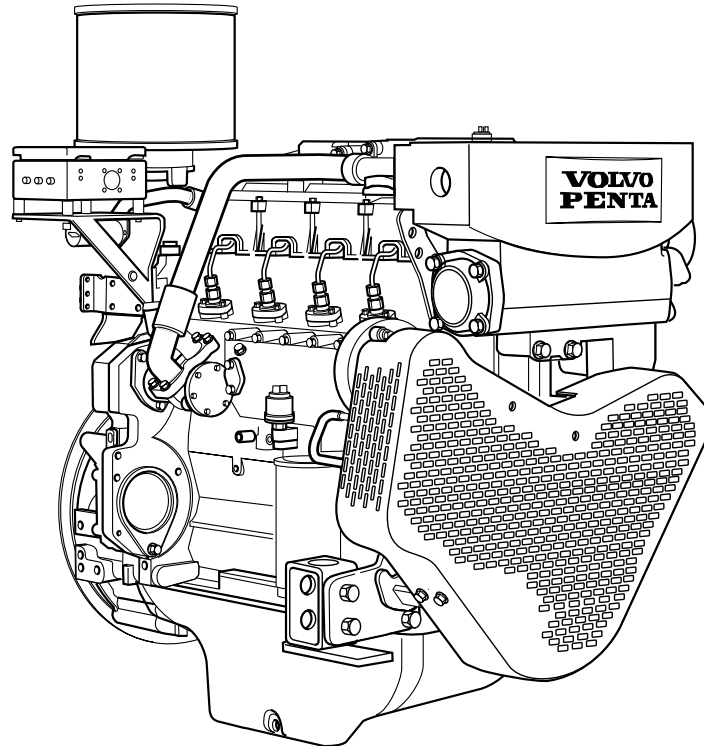

**D5A TA is a reliable, type-approved, marine diesel engine. It's designed by Volvo Penta to power a wide range of marine auxiliary applications.**

The rigid in-line 4 cylinder block has a high-pressure injection system with single injection pump and six-hole injection nozzles that operate under high pressure. In combination with the turbo and charge-air-cooler, the engine features fast response to load variations, low fuel consumption and low emission levels. The robust design, including a stable engine block and over-sized crankshaft bearings provide smooth operation and low noise.

**Typical applications:**

- Gensets
- Diesel electric applications
- Pumps
- Cranes
- Hydraulic power packs
- Air compressors
- Fire-fighting equipment

The compact, space saving design makes for easy installation and easily accessible service points.

- **Rigid and robust design**
- **Fuel-efficient and low emission levels**
- **High load acceptance**
- **Low weight, noise and vibrations**
- **Type-approved**
- **Classifiable by all major societies**
- **Compact installation and easy to service**

The engine can be equipped with a wide range of optional equipment and is available with a Heat Exchanger (HE) or Keel Cooled (KC) cooling system. The engine and equipment can be covered with the Extended Coverage which prolongs the standard warranty up to five years - or the corresponding number of running hours.

# D5A TA

## Technical Data

### General

Engine designation	D5A TA
Displacement, litre (in <sup>3</sup> )	4.76 (290.7)
Configuration and number of cylinders	in-line 4
Method of operation	4-stroke, direct-injected, turbocharged diesel engine with charge air cooler
Bore/stroke, mm (in.)	108/130 (4.25/5.12)
Compression ratio	17.6
Dry weight bobtail HE <sup>1)</sup> , kg (lb)	580 (1279)
Dry weight bobtail KC <sup>2)</sup> , kg (lb)	560 (1235)
Flywheel housing/SAE size	11.5" flywheel with SAE 2 housing

### Performance, fuel & emissions

Engine speed	1500 rpm	1800 rpm	
Crankshaft power HE, kW	92	100	
Crankshaft power KC, kW	92	100	
Spec.fuel.consump., g/kWh	at 50% load	220	230
	at 75% load	213	221
	at 100% load	214	220
Emission compliance	CCNR2	CCNR2	
Recommended fuel to conform to	ASTM-D975 1-D and 2-D, EN 590 or JIS KK 2204		

10% overload available acc. to class requirements. Fuel temperature 40°C (104°F). Technical data according to ISO 3046 Fuel Stop Power with a tolerance ±4%. Fuel with a lower calorific value of 42700 kJ/kg and density of 840 g/liter at 15°C (60°F). Merchant fuel may differ from this specification which will influence engine power output and fuel consumption.

<sup>1)</sup> Heat Exchanger cooled system (HE), <sup>2)</sup> Keel Cooled system (KC)

# D5A TA

## Technical description

### Engine and block

- Cylinder block, head and flywheel housing made of cast iron
- Belt guard
- Nitrocarburized transmission gears
- Press-hardened crankshaft
- Forged aluminum pistons
- Cylinder liners of wet type
- Exhaust elbow, dry, with integrated flexible compensator

### Lubrication system

- Oil filler in valve cover
- Manual oil drain pump
- Lubrication oil pump of rotor type
- Freshwater-cooled oil cooler
- Full flow oil filters of spin-on type
- Closed crankcase ventilation system

### Fuel system

- Fuel feed pump
- Jacketed fuel pipes
- Fine fuel filter of spin-on type
- Unit pumps
- Six-hole injectors
- Mechanical governor with smoke delimiter
- Fuel stopping solenoid 24V

### Heat Exchanger cooled system (HE)

- For seawater-cooled engines
- V-belt-driven freshwater pump
- Gear-driven seawater pump

- Engine-mounted tubular heat exchanger with integrated expansion tank

### Keel cooled system (KC)

- 1-circuit keel cooling system
- Belt-driven freshwater pump
- Engine-mounted expansion tank

### Optional equipment

#### Engine

- Twin oil filter with change over valve
- GAC electronic governor
- Single or twin fuel/water separating pre filter
- Twin fuel filters
- Silencer, dry, with or without spark arrestor
- Electrical or air starting systems available
- Hydraulic starting system only on special request for RC

#### Non classified control system

- 2-pole 24V system including:
  - Oil pressure shutdown
  - Oil pressure gauge (optional)
  - Coolant temp shutdown
  - Coolant temp gauge (optional)
  - Coolant level shutdown
  - Overspeed shutdown
  - Battery charging alarm
  - Rpm gauge
  - Hour counter

- Instrument panel for second control station
- Extension cables in different lengths

### Classified control and monitoring system MCC

- Alarm and monitoring functions according to classification
- Optional functions on request
- Modbus
- Configurable inputs and outputs
- SDU, shutdown unit, includes all shutdown functions required by classification societies


### Miscellaneous

- Engine heater 230V/600W
- Batteries 14V/140A
- Battery charger
- Synchronization unit (for GAC system)
- Load sharing unit (for GAC system)
- 2-pole 28V/55A alternator
- Spare parts according to classification recommendations

## Dimensions

Not for installation, mm (in.)

### Engine with HE (illustrated) & KC

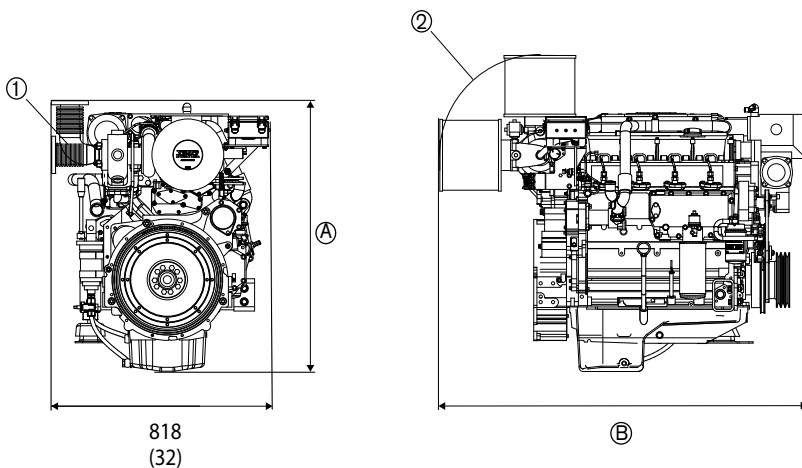

(A) HE 1000 (39) KC 1185 (347)

(1) HE: 90° or straight (option), KC: 90°.

(B) HE 1367 (54) KC 1354 (53)

(2) Adjustable position.

Volvo Penta is part of the Volvo Group, the world's leading manufacturer of trucks, buses, construction equipment and diesel engines. Volvo Penta has approximately 4,000 dealers in some 130 countries.

For further information, please contact your local Volvo Penta dealer or visit [www.volvopenta.com](http://www.volvopenta.com).

# VOLVO PENTA

**AB Volvo Penta**

SE-405 08 Göteborg, Sweden  
[www.volvopenta.com](http://www.volvopenta.com)

Not all models, standard equipment and accessories are available in all countries. All specifications are subject to change without notice. The engine illustrated may not be entirely identical to production standard engines.